


序号 No.	产品型号 Models	配套熔断体尺码 Matching fuse links Size	额定电压 (V) Rated voltage	额定电流 (A) Rated current	外形尺寸(mm) Outline dimension						重量(g) Weight
					图号 Fig.	A1	A2	B1	H1	H2	
D0079	RT18-32(X)	10×38	500	32	8.1	79	81	18	62	78	59
D0080	RT18B-10	8.5×23	500	10	8.1	80	82	18	60	78	59
D0081	RT18B-16	10×25.8	500	16	8.1	80	82	18	60	78	59
D0082	RT18B-20	8.5×31.5	500	20	8.1	80	82	18	60	78	59
D0083	RT18B-25	10×31.5	500	25	8.1	80	82	18	60	78	59
D0084	RT18B-32	10×38	500	32	8.1	80	82	18	60	78	59
D0085	RT18C-10	8.5×23	500	10	8.1	77	78	18	62	81	56
D0086	RT18C-16	10×25.8	500	16	8.1	77	78	18	62	81	56
D0087	RT18C-20	8.5×31.5	500	20	8.1	77	78	18	62	81	56
D0088	RT18C-25	10×31.5	500	25	8.1	77	78	18	62	81	56
D0089	RT18C-32	10×38	500	32	8.1	77	78	18	62	81	56
D0090	RT18M-32	10×38	500	32	8.1	78	78	18	60	80	56
D0091	RT18-63	14×51	500	63	8.1	103	105	25	77	108	192
D0092	RT18-63X	14×51	500	63	8.1	103	105	25	77	108	192
D0093	HG30-32	10×38	500	32	8.1	78	80	18	69	86	57
D0094	HG30-63	14×51	500	63	8.1	107	109	27	82	95	167

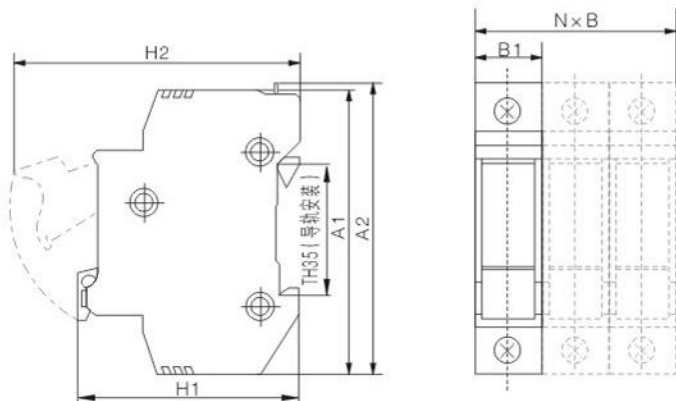

用途 Applications

本系列熔断器支持件适用于交流50Hz、额定绝缘电压至500V、约定发热电流至125A，主要用在电气线路中作为尺码至22×58的各种使用类别(gG、aM、aR等)的熔断体的支持件。本系列熔断器支持件具有耐受约定发热电流及预期短路冲击电流至100KA动热稳定的能力。其中可带熔断指示灯，灯亮指示熔断体已熔断。

本系列熔断器支持件符合国家标准GB13539.1、GB13539.2和国际电工委标准IEC60269-1、IEC60269-2、IEC60269-2-1等规定。

These fuse holders are supporters for fuses with size up to 22×58mm. They are capable of working under heat caused by rated current and expected short impacting current up to 100KA. It can also function as a fuse disconnecting switch by multi-phase combination. There are two in/out lines at the RT18N fuse base, providing a power cut function. With an indicator, with an indicator which goes on when the fuse links breaks.

Rated insulate voltage up to 500V; Working frequency 50Hz AC; Conventional free air thermal current up to 125A; Compliant with GB13539.1, GB13539.2 and IEC60269-1, IEC60269-2, IEC60269-2-1.

结构特点 Design Features

本系列熔断器支持件由塑料压制的外壳装上触头和载熔件后，经铆接或焊接而成，均可组成多相结构。RT19为敞开式。其他型号都是半封闭式结构。RT18型支持件均为TH35mm的导轨式安装，RT14-20型支持件可选螺钉安装或导轨安装。

After the plastic-injected case is equipped with contacts and fuse links, the bases are formed by welding or riveting both capable of being multi-phase structured. RT19 are open-structure, and others are semi-concealed structure. RT18 bases are all DIN rail installed. RT14-20 fuse base supports for the screw installation and the installation guide.

基本数据 Basic Data

产品型号、额定绝缘电压、约定发热电流、配置圆筒帽形熔断体尺码、外形尺寸见图8.1~8.7及表8（n相组合的宽度 $B_n=nB$ ）。

The models, rated insulate voltage, rated current, and dimensions are shown in Figures 8.1~8.7 and Table 8 (Width of N-phase combination is $B_n=nB$).