


序号 No.	熔断体型号 Models				尺码 Size	额定 电压 (V) Rated voltage	额定 电流 (A) Rated current	外形尺寸(mm)Outline dimension(mm)					重量 (g) Weight	
	本公司 JINSHAN		国内外同类产品 Cross-reference					图号 Fig	ΦA	ΦB	ΦC	ΦD		L
	普通(gG) Normal	快速(aR) Fast	普通(gG) Normal	快速(aR) Fast										
D0003	RL1-100	RLS1-100	-	-	-	380	50~100	5.2	6.5	27.5	32.5	27.5	62	92.8
D0004	RO201	RS201	5SB BLA	-	DIV	500	80	5.2	5	-	33.5	28.5	63	112.2
			RL6-100				100	5.2	7	-	33.5	28.5	63	115
D0005	RO202	RS202	5SB BLA	-	DV	600	150~350	5.2	8	-	45	38	63	200.5
D0006	RO203	RS203	5SB BLA	-	-	600	400~630	5.2	10	-	60	50	63	320

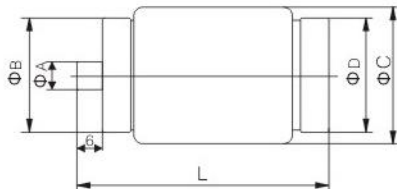

用途 Applications

本系列熔断体适用于交流50Hz、额定电压至600V、额定电流至630A，主要用在电气装置中作线路过载和短路保护（gG/gL）；还可派生为半导体器件及其成套装置的短路保护（aR）以及电动机短路保护（aM）。

本系列熔断体额定分断能力至50KA。

本系列熔断体符合国家标准GB13539和国家电工委标准IEC60269。

Protection against overload and short-circuit in electric lines(type gG/gL),also available for protection of semiconductor parts and equipments against short-circuit(type aR)and protection of motors(type aM).

Rated voltage up to 600V; Rated current up to 630A; Rated breaking capacity up to 50KA. Compliant with GB13539 and IEC60269.

结构特点 Design Features

由纯铜/银（或丝）制成的变截面熔体封装于由高强度瓷制成的熔管内；熔管中充满经化学处理过的高纯度石英砂作为灭弧介质。熔断体端帽上有熔断指示器，当熔断体熔断时，指示器立即弹出，显示熔断体已熔断。


Variable cross-section fuse element made from pure metal sealed in cartridge made from high-duty ceramic.Fuse tube filled with chemically treated high-purity quartz sand as arc-extinguishing medium.Indicator springs out when fuse cuts to give caution.

基本数据 Basic Data


熔断体型号、外形尺寸、额定电压、额定电流见图5.1~5.6及表5。

The models,dimensions,ratings are shown in Figures5.1~5.6 and Tables 5.


特性曲线 Characteristics Curve

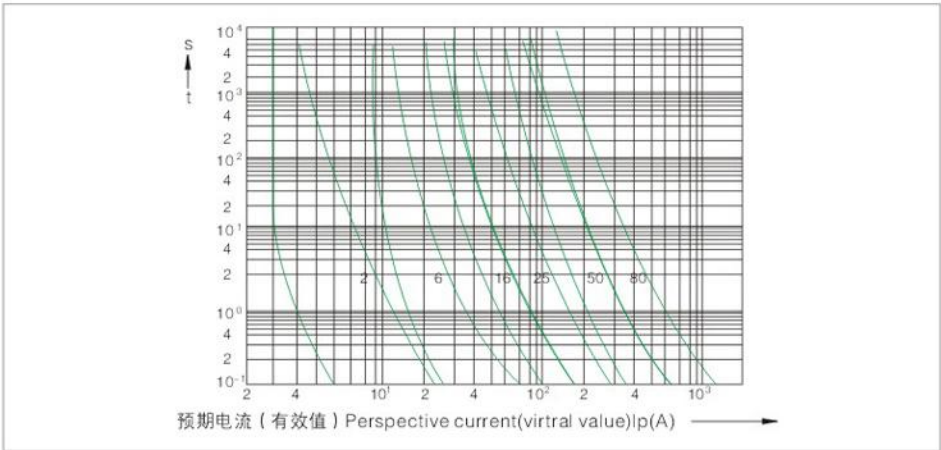

"gG"熔断体的时间-电流带 Time-current range of "gG"fuse links

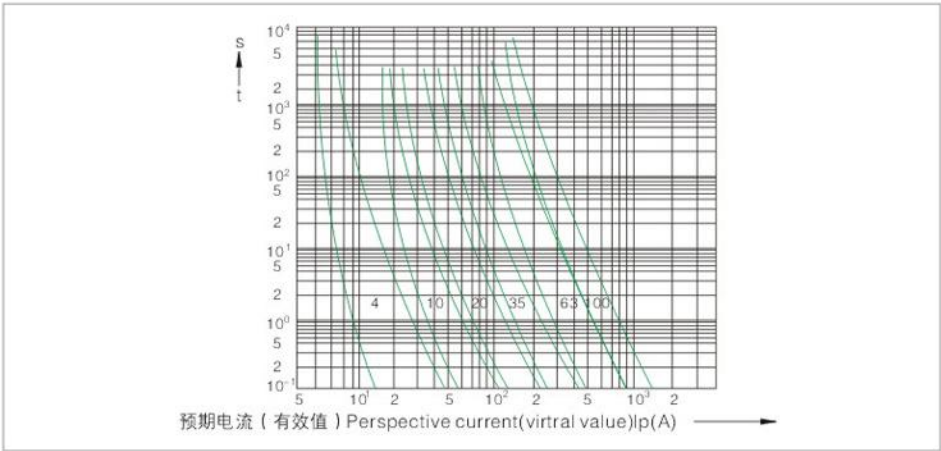

"gG"熔断体的时间-电流带 Time-current range of "gG"fuse links

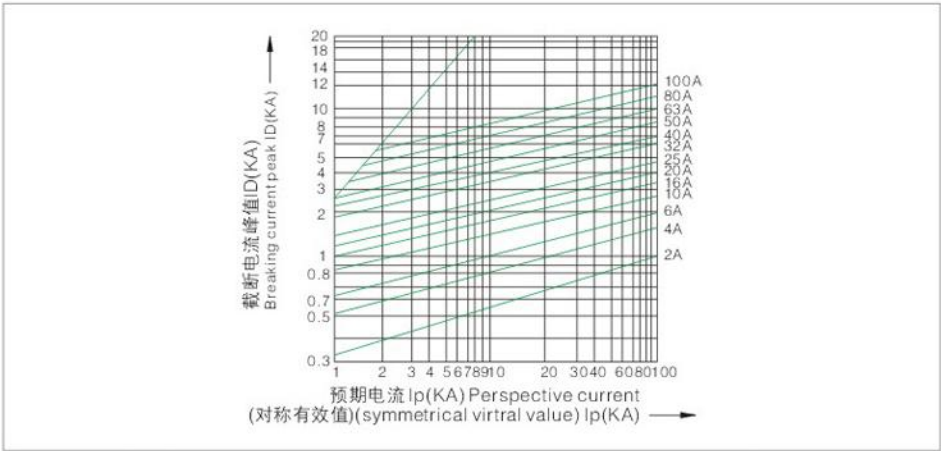

"gG"熔断体的截断电流特性曲线 Breaking current characteristics curve of "gG" fuse links